


2' X 2' FLUORESCENT SUSPENDED CEILING TROFFER

OT Series

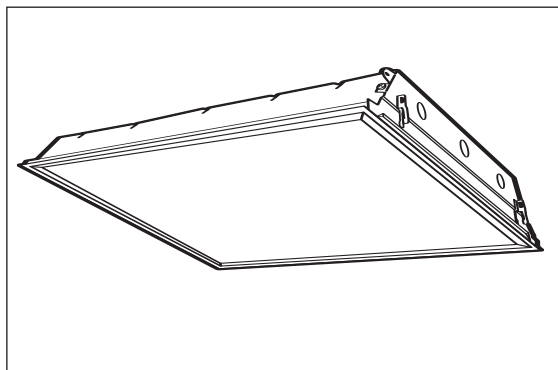

PRODUCT FEATURES

- Mitered door frame prevents 100 % of all light leakage.
- Constructed of one-piece ribbed unitized housing and corners that interlock to prevent aesthetical damage to fixture.
- Spring loaded cam latches firmly secure frame on either side.
- All sides and corners are turned in and hemmed for safe handling and installation.
- Easy frontal lamping which allows lamps to be installed or removed in any order.
- Built-in seismic tabs. No need to purchase separate clips.
- Captive-bolt ballast mounting allows frontal access to ballast.
- Four corner tie points are standard for safety wire support when required.
- Shallow design allows for commercial and industrial buildings requiring general illumination with recessed configurations.
- Super tough hemmed door frame provides extra rigidity and no sharp edges.
- Post painted.
- Clear 0.10thk A12 acrylic lens is standard.
- UL listed.


ORDERING INFORMATION

Example: **22-OT-4-32-A12-EMG B100**

22	OT		4	32				A12	EMG B100
<div>FIXTURE SIZE</div> <div>22 - 2' X 2'</div>	<div>SERIES</div> <div>OT-Oracle Troffer</div>	<div>TRIM TYPE</div> <div>(Blank)-Grid</div>	<div>LAMPS</div> <div>2 3 4</div>	<div>LAMP TYPE</div> <div>32- 32W U6 T8 24- 24W T5HO¹ 17- 17W T8² 14- 14W T5³ 40- 40W BX TT⁴</div>	<div>LAMP INSTALLED</div> <div>(Blank)- No lamp installed L30K-30K lamp L35K-35K lamp L41K-41K lamp</div>	<div>BALLAST</div> <div>(Blank)-1 Ballast 2-2 Ballast</div>		<div>VOLTAGE</div> <div>(Blank)- MVOLT (120/277)⁶ 120 277 347</div>	<div>DIFFUSER TYPE</div> <div>A12</div>
<div>BALLAST TYPE</div> <div>(Blank)- ≤ 10% THD,Instant Start⁶ EPS- ≤ 10% THD, Programmed Start ADV-7- Advance 7 Dimming Ballast ADV-10- Advance 10 Dimming Ballast Lut-H (FDB)- Lutron 1% Dimming 3-wire Lut-E (ECO)-Lutron 10% Dimming 3-wire</div> <div>(See ballast matrix for compatibility)</div>							<div>OPTIONS</div> <div>C3- 3-wire Flex Cable (Single Circuit) CB- 4 wire Flex Cable (Double Circuit) EMG B100- Emergency Battery Pack (350-450 Lumens) EMG B90- Emergency Battery Pack (500-600) Lumens EMG B70A- Emergency Battery Pack (600-700 Lumens) EMG B50- Emergency Battery Pack (1350 Lumens) EMG B50ST- Emergency Battery Pack with (1350 Lumens) self-testing & self-diagnostics EMG B50CP- Emergency Battery Cold Pack 1350 (1100-1200 Lumens)⁵ FBF - Internal Fast Blow Fuse SBF- Internal Slow-Blow Fuse RIS- Radio Interference Suppressor</div> <div>(See emergency matrix for complete options)</div>		
<div>BALLAST/LAMP COMPATIBILITY</div>									
	32 U6T8	24 T5HO	17 T8	14 T5	40W TT				
EIS	●		●	●	●				
EPS	●	●	●	●	●				
ADV-7	●		●		●				
ADV-10	●	●	●		●				
Lut-H (FDB)	●	●	●		●				
Lut-E (ECO)	●	●	●	●	●				

Notes:

1. Available with Lut-E (ECO) up to 2 lamps per ballast, Lut-H (FDB) up to 2 lamps per ballast, and ADV-10 series in 2 only.
2. Available with Lut-E (ECO), Lut-H (FDB) ADV10, and ADV-7 dimming up to 3 lamps per ballast.
3. Available with Lut-E (ECO) 2 lamps max.
4. Available with Lut-E (ECO), Lut-H (FDB) up to 3 lamps per ballast and ADV-7 and ADV-10 dimming up to 2 lamps per ballast.
5. Available only in 17W lamps.
6. Not available for T5HO lamps.



DIMENSION: Length: 24" X Width: 24" X Depth: 3-13/16"